


GRX-CBL-346S Cable

Non-Plenum rated cable for use with the following Lutron systems:

- GRAFIK Eye 3000
- GRAFIK Eye 4000
- GRAFIK Eye QS
- LCP128
- Softswitch128
- Quantum
- HomeWorks Interactive
- HomeWorks QS
- Energi Savr Node
- Sivoia QS, Sivoia QS Wireless, and Contract Series

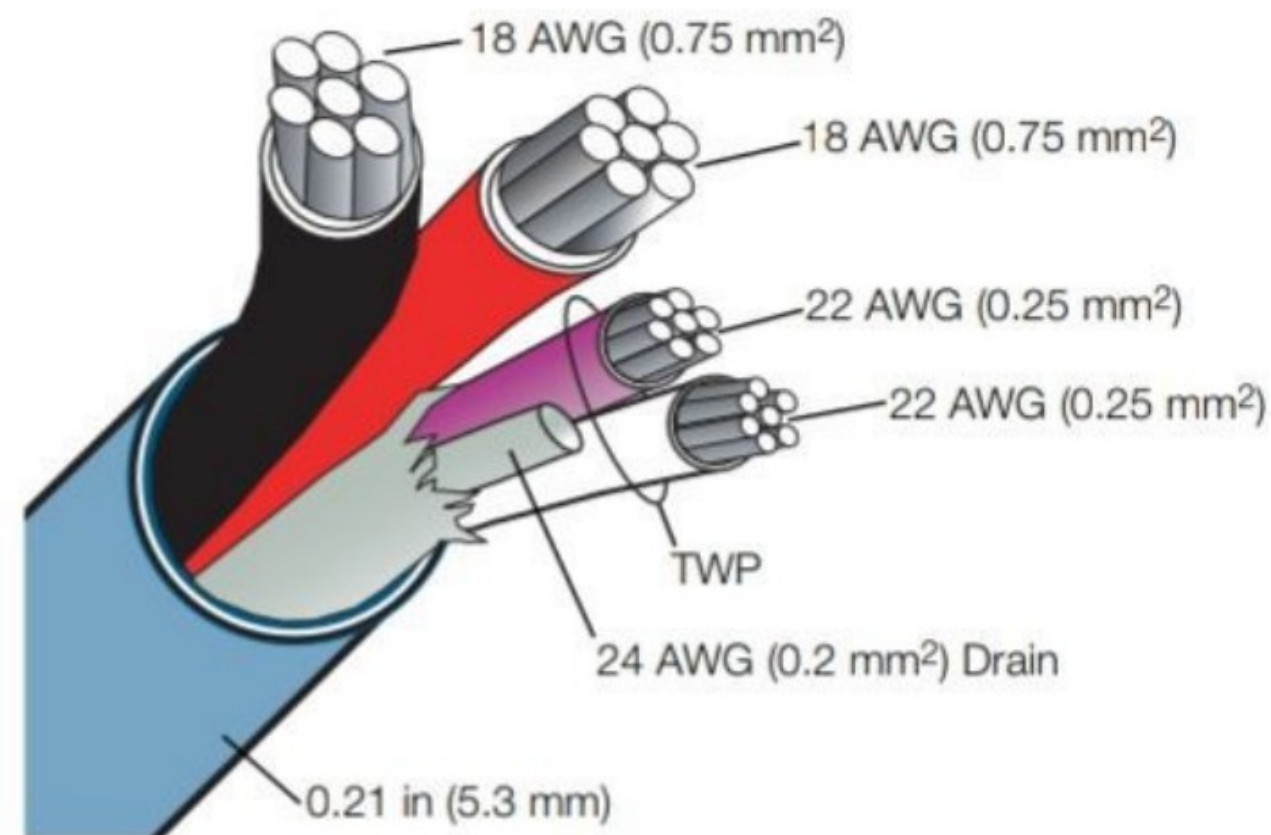

Specifications

- Model number:
GRX-CBL-346S-500 – 500 ft (150 m) spool
- Listed as type CL3R or CMR cULus.
- Five conductors:
 - Common – 18 AWG (0.75 mm²)
 - Power – 18 AWG (0.75 mm²)
 - MUX Data – 22 AWG (0.25 mm²)
 - MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
 - Drain Wire – 24 AWG (0.2 mm²)
- Total outer jacket diameter: 0.21 in (5.3 mm).
- 300 V rated.
- PVC sheath, 75 °C rated.
- UL Listed.
- Rated FT4.
- cULus or CSA Listed.
- CPR Classification: E_{CA}
- Capacitance of 22 AWG (0.25 mm²) twisted wire pair:
 - Conductor to shield: 48 pf/ft max
 - Conductor to conductor: 25 pf/ft max

Note: Control link wiring distance maximums and other limitations for GRX-CBL-346S cable are the same as those for GRX-PCBL-346S (plenum rated) cable and QS-CBL-LSZH (low-smoke zero-halogen rated) cable. Please refer to the Product Specification Submittal Sheets or Product Installation Guides at www.lutron.com for details.

Lutron, Lutron, GRAFIK Eye, GRAFIK 6000, Softswitch128, HomeWorks, and Quantum are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries. Energi Savr Node, GRAFIK 5000, GRAFIK 7000, HomeWorks Interactive, and LCP128 are trademarks of Lutron Electronics Co., Inc.

Job Name:	Model Numbers:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
Job Number:	<input type="text"/>	<input type="text"/>